
Fireball.3.1 – Product Specification

URBAN DESIGN



Fireball.3.1

This new Fireball impresses with its size, elegance and playing pleasure. The infill of the ring and the slip-proof HDPE surface provides the necessary grip while spinning. Simply stand up, hold on and off you go.

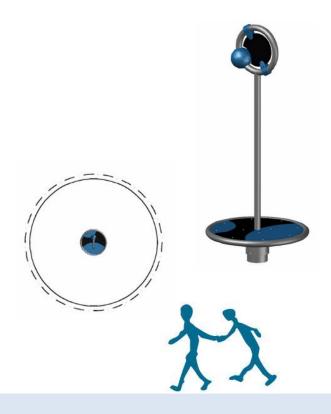

Fireball.3.1 – at a glance.

Product Family: Item Number: Children's Age: Fall Height (DIN EN 1176): Length x Width x Height:

Protective Surfacing Area (DIN EN 1176): Protective Surfacing Area (ASTM 1487):

Minimum space required DIN EN 1176: Minimum space required ASTM 1487:

Playpoints 90.260.308 5+

0.31 m (1'-1") 1.0 m x 1.0 m x 2.3 m (3'-4" x 3'-4" x 7'-7")

5.0 m x 5.0 m 4.7 m x 4.7 m (15'-5" x 15'-5")

19.5 m² 16.9 m² (182 ft²) Number of Foundations: Concrete Volume C20/C25: Number of skilled installers required: Installation Time without foundation: Dimensions of largest part:

Weight of the heaviest part: Shipping Volume: Shipping Weight: Spare part guarantee: 1 pc. 0.5 m³ (17.7 ft³)

2 2 hours

1.0 m x 1.0 m x 2.6 m (3'-4" x 3'-4" x 8'-7")

(3'-4" x 3'-4" x 8'-7 120 kg (265 lbs) 1.1 m³ (243 ft³) 135 kg (298 lbs) Lifelong

Technical Data.

The following text can also be used for tenders.

Turntable:

Stainless steel plate \emptyset 960 mm (3'-2"), covered with HDPE panels, the cheeks are welded with stainless steel handrails \emptyset 60.3 mm (2 3/8")

Tubes:

Stainless steel tubes, Ø 60.3 mm (2 3/8")

Stand

Stainless steel Picolino swivel stand with fully encapsulated bearing



Berliner Seilfabrik GmbH & Co. Lengeder Straße 2/4 D-13407 Berlin

Tel. +49.(0)30.41 47 24-0 Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com www.berliner-seilfabrik.com

Nodes:

Frameworx®-aluminum ball connectors; Ø 250 mm (9-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; securely closed with durable EPDM- caps

Covering:

Revision: September 2017

Antiskid HDPE panels bolted on the turntable

