
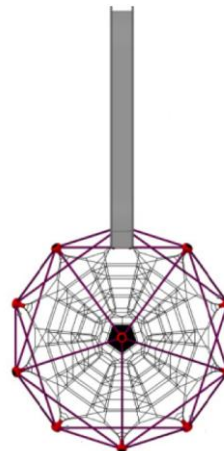


Product Specification Sheet

Roplay VARIO L + Slide

Product name	Roplay VARIO L + Silde
Item number	7030014700100
Recommended age group	8+
Falling Height (EN 1176)	2,8 m (9'-2")
Length, width, height	10,2 x 5,1 x 4,4 m (33'-6" x 16'-9" x 14'-5")
Protective Surfacing Area required (EN 1176)	14,6 x 10,0 m (47'-11" x 32'-10")
Minimum space required (EN 1176)	92,3 m ² (994 ft ²)
Ground anchor plates 700 mm below level	5
Number of skilled installers needed	2
Installation time without foundation	6 hours
Dimensions of largest part	7,4 x 1,0 x 0,6 m (24'-3" x 3'-3" x 1'-12")
Weight for heaviest part	140 kg (309 lbs)
Freight volume	6,0 m ³ (212 ft ³)
Gross weight	140 kg (309 lbs)
Spare part guarantee	Lifelong
Certificate No. EN 1176	Z1A 14 03 10256 204

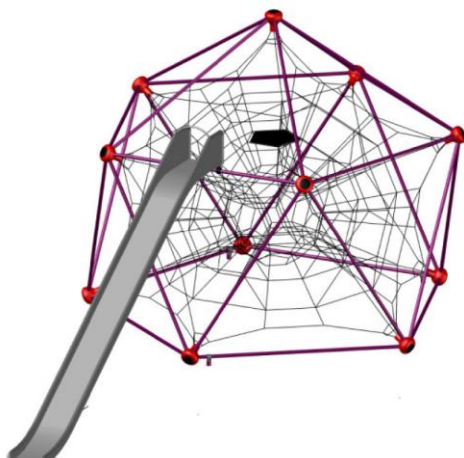

Product description:

Roplay VARIO L + Slide, icosahedron space framework, Height 4,4 m (14'-5") with a single Bucky-Ball net structure.

All anchor points are equipped with a central single-point tensioning system warranting that no fastening element or rope eyelet is accessible to users. The 25 steel members $\varnothing 48,3 \times 1466$ mm ($\varnothing 1 \frac{7}{8}'' \times 4'-10''$) in the framework are corrosion resistant and powder-coated environmentally sound.

The 11 aluminum-cast nodes in the framework are also coated in the zinc-powder-process.

The spatial netting is made of polyester-coated steel cables (U-Rope®) with a diameter of 16 mm (5/8"). Contrary to cable coatings out of polypropylene the polyester is more abrasion-resistant and color fast to UV-light. The steel wires are drawn galvanized.

As cross connectors in the spatial netting aluminium-cloverleaf rings are being used that have been proven in 20 years of employment.