
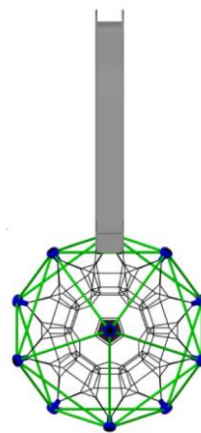


Product Specification Sheet

Roplay VARIO M + Slide

| | |
|--|--|
| Product name | Roplay VARIO M + Slide |
| Item number | 7030013500100 |
| Recommended age group | 5+ |
| Falling Height (EN 1176) | 2,1 m (6'-11") |
| Length, width, height | 8,2 x 3,8 x 3,2 m (26'-11" x 12'-7" x 10'-6") |
| Protective Surfacing Area required (EN 1176) | 12,2 x 7,7 m (40'-5/16" x 25'-3") |
| Minimum space required (EN 1176) | 58,8 m ² (633 ft ²) |
| Ground anchor plates 700 mm below level | 5 |
| Number of skilled installers needed | 2 |
| Installation time without foundation | 5 hours |
| Dimensions of largest part | 6,1 x 1,0 x 0,6 m (20'-3/16" x 3'-3" x 1'-11") |
| Weight for heaviest part | 90 kg (198 lbs) |
| Freight volume | 5,6 m ³ (198 ft ³) |
| Gross weight | 440 kg (970 lbs) |
| Spare part guarantee | Lifelong |
| Certificate No. EN 1176 | Z1A 14 03 10256 204 |

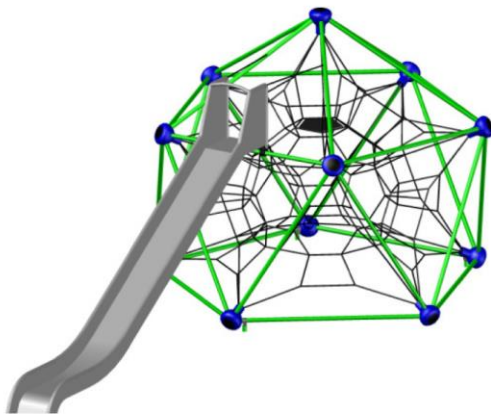

Product description:

Roplay VARIO M + Slide, icosahedron space framework, Height 3,2 m (10'-6") with a single Bucky-Ball net structure.

All anchor points are equipped with a central single-point tensioning system warranting that no fastening element or rope eyelet is accessible to users. The 25 steel members $\varnothing 48,3 \times 1466$ mm ($\varnothing 1 \frac{7}{8}'' \times 4'-10''$) in the framework are corrosion resistant and powder-coated environmentally sound.

The 11 aluminum-cast nodes in the framework are also coated in the zinc-powder-process.

The spatial netting is made of polyester-coated steel cables (U-Rope®) with a diameter of 16 mm (5/8"). Contrary to cable coatings out of polypropylene the polyester is more abrasion-resistant and color fast to UV-light. The steel wires are drawn galvanized.

As cross connectors in the spatial netting aluminium-cloverleaf rings are being used that have been proven in 20 years of employment.