
## Instructions for maintenance



In addition to the manufacturer-related service instructions, we strongly advise the operator/owner to consider the corresponding prescriptions of the European Standard EN1176-7.

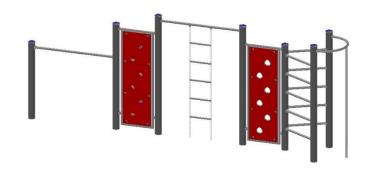

## K&K Climbing 055414501 combination

One-time maintenance

Check all screw connections; retighten, if necessary.

| Check all screw connections, relighten, il necessary.   | approx. 4-  | prox. 4-5 weeks after installation |              |                      |              |             |  |
|---|-------------|------------------------------------|--------------|----------------------|--------------|-------------|--|
| Recommended regular inspection and maintenance  | once a week | twice per month                    | once a month | four times a<br>year | twice a year | once a year |  |
| Where appropriate, clean playing sand   |             |                                    |              |                      |              |             |  |
| Check cleanliness of playing and safety area. Remove any foreign object   | jn          |                                    |              |                      |              |             |  |
| Check chains of chain ladder for wear, replace if necessary. The nominal chain thickness must not diminish more than 30% (< 4,5 mm). Beyond that limit, a chain replacement is indispensable. |             |                                    |              |                      |              |             |  |
| Check climbing handles for wear, replace if necessary   |             |                                    |              |                      |              |             |  |
| Where appropriate, check synthetic surfacing material for damages or severe wear, repair or replace, if necessary   |             |                                    |              |                      |              |             |  |
| Check tightness of stand construction: stability of (vertical) posts supports, retighten screw connections, if necessary.   | or          |                                    |              |                      |              |             |  |
| Check further structural components for wear and tightness; retighten, if necessary and replace defective parts.  |             |                                    |              |                      |              |             |  |
| Check foundations and structural construction for corrosion or decay, repair or replace if necessary  |             |                                    |              |                      |              |             |  |

once,

Please note: The above-mentioned maintenance intervals only have recommendatory character. They must necessarily be adapted to the local circumstances of each playground (frequency of use, social setting, risk and frequency of vandalism etc.).