


## Net Swing – Product Specification



### Net Swing

Just hang out comfortably and still look good!  
The organic form language of the curved posts in combination with colored balls make the net swing to a visual highlight of urban open spaces.

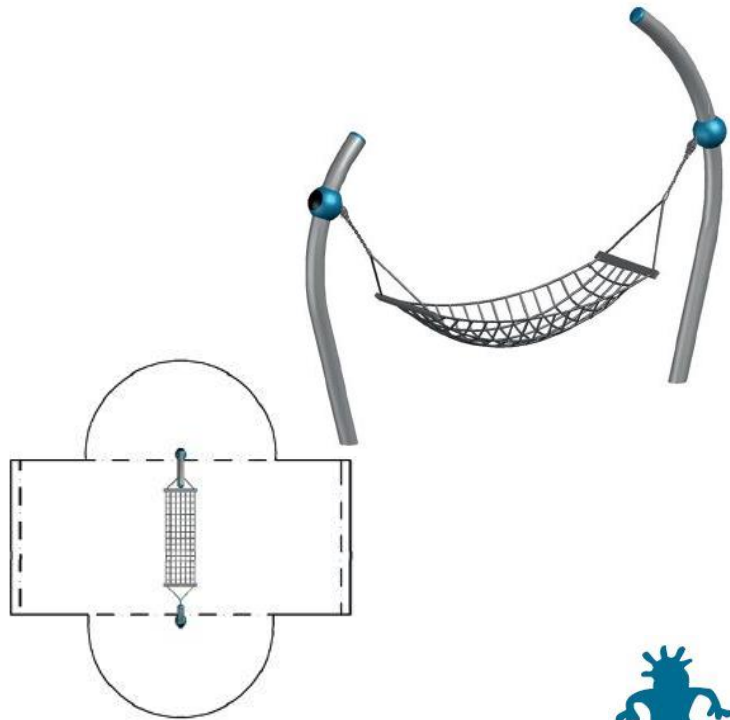

### Net Swing – at a glance.

Product Family:	<b>Playpoints</b>	Number of Foundations:	<b>2 pc.</b>
Item Number:	<b>90.260.533.0</b>	Concrete Volume C20/C25:	<b>1.2 m<sup>3</sup> (43 ft<sup>3</sup>)</b>
Children's Age:	<b>5+</b>	Number of skilled installers required:	<b>2</b>
Fall Height (DIN EN 1176):	<b>1.75 m (5'-9")</b>	Installation Time without foundation:	<b>3 hours</b>
Length x Width x Height:	<b>3.8 m x 0.7 m x 2.9 m (12'-6" x 2'-4" x 9'-7")</b>	Dimensions of largest part:	<b>2.2 m x 0.3 m x 0.2 m (7'-3" x 1'-0" x 0'-8")</b>
Protective Surfacing Area (DIN EN 1176):	<b>6.6 m x 3.2 m</b>	Weight of the heaviest part:	<b>55 kg (122 lbs)</b>
Protective Surfacing Area (ASTM 1487):	<b>7.4 m x 7.0 m (24'-4" x 23'-0")</b>	Shipping Volume:	<b>2.8 m<sup>3</sup> (99 ft<sup>3</sup>)</b>
Minimum space required DIN EN 1176:	<b>21.0 m<sup>2</sup></b>	Shipping Weight:	<b>190 kg (419 lbs)</b>
Minimum space required ASTM 1487:	<b>33.2 m<sup>2</sup> (358 ft<sup>2</sup>)</b>	Spare part guarantee:	<b>Lifelong</b>

### Technical Data.

The following text can also be used for tenders.

#### Hammock:

Rope Ø 16 mm (5/8"); hammock net with mesh width approx. 100 x 100 mm (3-15/16" x 3-15/16"); with two in situ-replaceable square rungs; rungs comprised of stainless steel profile with aluminum end caps; two swivel joints connect to aluminum clamps

#### Nodes:

Framework®-aluminum ball connectors; Ø 250 mm (9-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; securely closed with durable EPDM- caps

#### Posts:

Steel pipes Ø 133 mm (5 1/4"); wall thickness 5 - 10 mm (3/16" - 3/8") with a round cast aluminum post top; anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process

#### suspension:

U-Rope®-round strand ropes with galvanized steel cores, external strands are covered with high abrasion-resistant and UV-resistant polyester-yarn (no Polypropylene); Ø 16 mm, connected to universal joint with steel chains

  
**Berliner**  
Berliner Seilfabrik GmbH & Co.  
Lengeder Straße 2/4  
D-13407 Berlin

Tel. +49.(0)30.41 47 24-0  
Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com  
www.berliner-seilfabrik.com

