


3 x Screw connection spring/jumping disc consisting of:
 1 Spring Ø120x280x12
 1 K&K Spring holder
 1 pair of locking washers M12-A4
 1 Hexagon screw M12x60-A2

Falling space/ impact area, approx. 13 m²
 (Impact attenuating surface required)



Ratchet ring spanner

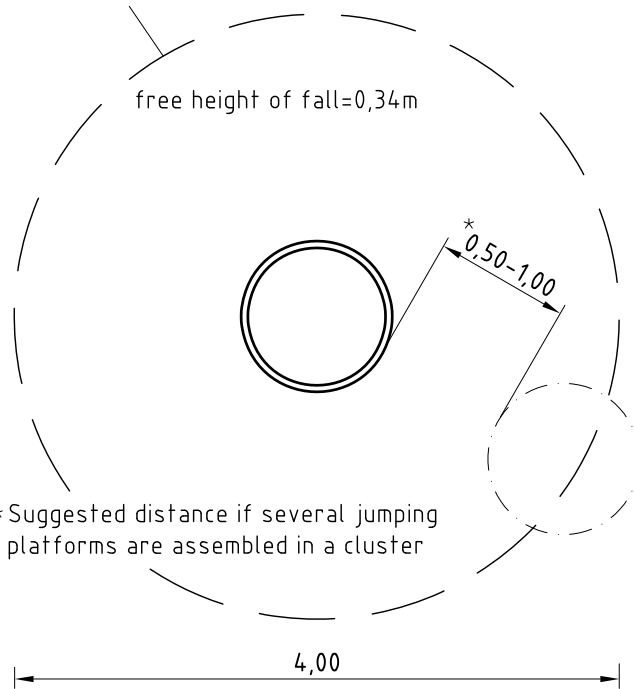

3 x Screw connection spring/concrete consisting of:
 1 K&K Spring holder
 1 pair of locking washers M12-A4
 1 Hexagon screw M12x50-A2



Attention, important hint:
 Insert spring fasteners by turning them into the spring windings as far as possible and tighten fastening screws with ratchet ring spanner. (90 Nm)

1. Install springs with the springholders on the concrete and Jumping disc with ratchet ring spanner.
2. Assign location of equipment considering the space requirements/ impact area.
3. Excavate soil for foundation, according to drawing.
 Please note: To achieve a maximum of stability and a safe installation a normal level of soil solubility is required.
4. Put complete jumping platform into foundation hole (upper edge of pre-fabricated foundation = playlevel).
5. Check all screw connections according to maintenance instructions after 4-5 weeks and screw down again if necessary.

Please take care that all special tools (e.g. special Allen key for secured Allen screws etc.) and all specific documents which are or may be useful for safety management acc. to EN 1176-7 (e.g. invoice, delivery note, order acknowledgement, installation instructions, maintenance instructions) are forwarded to the responsible persons.