

HodgePodge

Calisthenics.02 Product Specifications


















Published: March 2020


Calisthenics.02

HodgePodge is a clever and versatile combination of play equipment and climbing structures that can be used anywhere and for numerous activities. A calisthenics system for sport activity, climbing trees, Wasps' nest, zip lines, swings and carousels for fun and excitement.

Calisthenics.02 combines climbing and calisthenics in one. Whether pull-ups or hand-overhand moves, fitness fans will be spoiled for choice when using this piece of apparatus, which is more than 9 metres long. Calisthenics.02 is just one of many possible variants: the colour, shape and functionality can be tailored to specific requirements so as to fit in with the surroundings, whether urban or natural.

95.190.481

 Product Family	HodgePodge
 Length x Width x Height (m) Length x Width x Height ("'-")	3,2 x 9,9 x 2,4 10-5 x 32-6 x 7-10
 Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("'-")	7,2 x 12,9 6,9 x 13,6 22-5 x 44-6
 Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("'-")	2,39 7-10
 Age	5
 Minimum Space required acc. to DIN EN 1176 (m ²) Minimum Space required acc. to ASTM 1487 (ft ²)	68,8 677
 Number of Foundations	4
 Concrete Volume C20/C25 (m ³)	4,2
 Number of skilled Installers required	3
 Installation Time without Foundation	12 hours
 Dimensions of largest Part (m)	On request
 Weight of heaviest Part (kg)	On request
 Shipping Volume (m ³)	On request
 Total Weight (kg)	On request
 Spare Part Guarantee	Lifelong

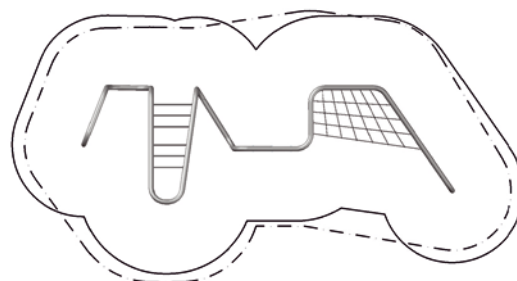

Technical Data

The following text can also be used for tenders.

Tubes:

The bent steel tubes with a diameter of \varnothing 168 mm (6 5/8") are thermally galvanised to protect against corrosion and powder-coated in colour using a solvent-free epoxy-polyester-process.

Bars:

Stainless steel tubes with a diameter of \varnothing 40 mm (1 9/16") and a wall thickness of 5 mm (3/16").

Handles:

The handles are made of galvanised steel and have a rubber covering.

Charlotte-Connector:

Internal fastening system for single rope endings at the arch tubes. The fixing works without hooks or visible ferrules, pre-prepared net segments can easily get installed and still stay exchangeable.

Rope:

The U-Rope® with strand cores and rope core made of galvanised wires has outer strands which are covered with highly abrasion-resistant and highly UV-resistant polyester yarn (not polypropylene). The rope diameter is \varnothing 18 mm (11/16").

Planar Net:

The planar net with a mesh size of at least 250 x 250 mm (9 13/16" x 9 13/16") is permanently localised at the rope crossing points by durable drop-forged aluminium balls (no plastic).