



### Disk L

On this inclined surface, you won't only spin in circles but also ride up and down! Thanks to a new, even slimmer bearing beam and the two-color EPDM coating, the Disk L appears more elegant than ever. The concave surface is not only fun but also trains body control at the same time.



### Disk L – at a glance.


Product Family:	<b>Playpoints</b>	Number of Foundations:	<b>1 pc.</b>
Item Number:	<b>90.260.301.1</b>	Concrete Volume C20/C25:	<b>0.8 m<sup>3</sup> (14.2 ft<sup>3</sup>)</b>
Children's Age:	<b>5+</b>	Number of skilled installers required:	<b>2</b>
Fall Height (DIN EN 1176):	<b>0.8m (2'-8")</b>	Installation Time without foundation:	<b>2 hours</b>
Length x Width x Height:	<b>1.66 m x 1.66 m x 0.8 m</b> <b>(5'-6" x 5'-6" x 2'-8")</b>	Dimensions of largest part:	<b>1.66 m x 1.66 m x 0.8 m</b> <b>(5'-6" x 5'-6" x 2'-8")</b>
Protective Surfacing Area (DIN EN 1176):	<b>7.9 m x 7.9 m</b>	Weight of the heaviest part:	<b>100 kg (221 lbs)</b>
Protective Surfacing Area (ASTM 1487):	<b>5.5 m x 5.5 m</b> <b>(18'-1" x 18'-1")</b>	Shipping Volume:	<b>4.0 m<sup>3</sup> (142 ft<sup>3</sup>)</b>
Minimum space required DIN EN 1176:	<b>48.2 m<sup>2</sup></b>	Shipping Weight:	<b>140 kg (309 lbs)</b>
Minimum space required ASTM 1487:	<b>23.7 m<sup>2</sup> (256 ft<sup>2</sup>)</b>	Spare part guarantee:	<b>Lifelong</b>
		Certificate according to DIN EN 1176:	<b>No.: Z2 010256 0280</b> <b>TÜV Product Service</b>

  
**Berliner**  
 Berliner Seilfabrik GmbH & Co.  
 Lengeder Straße 2/4  
 D-13407 Berlin

Tel. +49.(0)30.41 47 24-0  
 Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com  
 www.berliner-seilfabrik.com



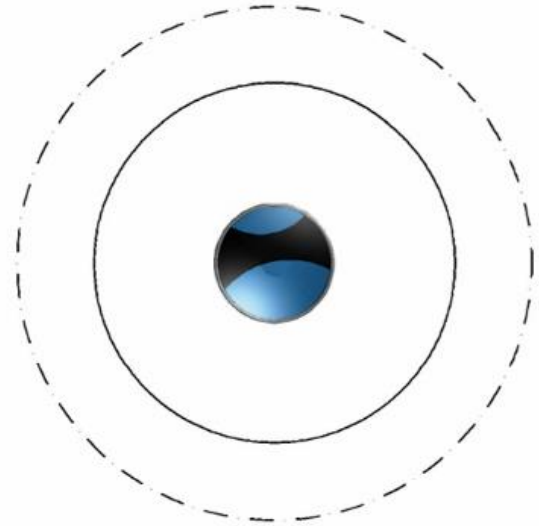

### Technical Data.

The following text can also be used for tenders.

#### Turntable:

concave stainless steel bowl, the cheeks are welded with stainless steel handrails  $\varnothing 60,3$  mm (2 3/8").  
Total diameter approx.  $\varnothing 1660$  mm (5'-6")

#### Stand:

5° inclined stainless steel base tube  $\varnothing 323,9$  mm (1'-1") with stainless steel cover tube  $\varnothing 355,6$  mm (1'-1")

#### Bearing:

Fully encapsulated bearing

#### Coating:

EPDM-rubber-coating area within the Disk

**When following DIN EN 1176 protective surfacing suitable for a free fall height of 1000 mm or more has to be used.**

