

# Twist & Shout

Shout.07 Product Specification


















Published: March 2020



## Shout.07

With its helical shape, the product "Twist" adapts to any landscape. Arches of different sizes can be combined at various angles. No matter whether the climbing structure is 5 or 500 metres long, the net made of original Berliner U-Rope provides continuous climbing fun for young and old alike on a varied and challenging climbing course. Shout's steel frames run parallel.

At Shout.07 you can climb up and down at various angles, while the integrated rubber membrane cube offers space to relax and bounce. A rubber membrane ascent, two balancing ropes and a banister complete this rope landscape.

## 95.190.606

 Product Family	<b>Twist &amp; Shout</b>
 Length x Width x Height (m) Length x Width x Height ("'-")	<b>13,1 x 12,7 x 3,2</b> <b>42-11 x 28-10 x 10-4</b>
 Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("'-")	<b>16,1 x 12,7</b> <b>16,8 x 12,5</b> <b>54-11 x 40-10</b>
 Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("'-")	<b>2,80</b> <b>9-3</b>
 Age	<b>5</b>
 Minimum Space required acc. to DIN EN 1176 (m²) Minimum Space required acc. to ASTM 1487 (ft²)	<b>141,6</b> <b>On request</b>
 Number of Foundations	<b>13</b>
 Concrete Volume C20/C25 (m³)	<b>28,8</b>
 Number of skilled Installers required	<b>On request</b>
 Installation Time without Foundation	<b>On request</b>
 Dimensions of largest Part (m)	<b>On request</b>
 Weight of heaviest Part (kg)	<b>On request</b>
 Shipping Volume (m³)	<b>On request</b>
 Total Weight (kg)	<b>On request</b>
 Spare Part Guarantee	<b>Lifelong</b>

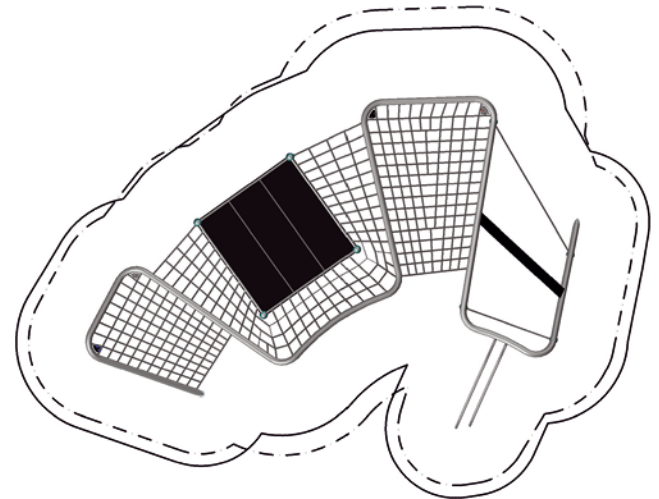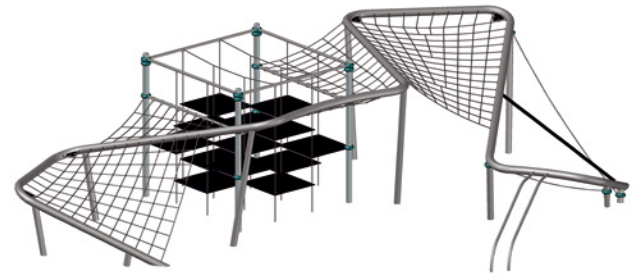

### Technical Data

The following text can also be used for tenders.

#### Included Products:

- Banister
- Rubber Ramp
- Rubber Membranes

#### Arch Structure and Supporting Tubes:

The steel pipes with diameters of Ø 133 mm (5 ¼") and Ø 168 mm (6 ⅝") and a wall thickness of 10 mm (⅜") are sand-blasted, spray galvanised and powder-coated in a solvent-free epoxy-polyester-process to protect against corrosion.

#### Ropes:

The U-Rope® with strand cores and rope core made of galvanised wires has outer strands which are covered with highly abrasion-resistant and highly UV-resistant polyester yarn (not polypropylene). The rope diameters are Ø 16 mm (⅝") and Ø 18 mm (11/16").

#### Charlotte-Connector:

Internal fastening system for single rope endings at the arch tubes. The fixing works without hooks or visible ferrules, pre-prepared net segments can easily get installed and still stay exchangeable.

#### Planar Net:

The planar net with a rope diameter of Ø 18 mm (11/16") and a mesh size of at least 250 x 250 mm (9 13/16" x 9 13/16") is permanently localised at the rope crossing points by durable drop-forged aluminium balls (no plastic).

#### Straight Banister:

The straight and parallel stainless steel tubes with a diameter of Ø 60,3 mm (2 ⅜") and a wall thickness of 3 mm (1/8") are connected to the main frame.

#### Rubber Ramp and Rubber Membranes:

The Rubber Mats are made of durable and vandal-proof conveyor belt. The handles are milled from HDPE plates.