

Urban Design

Fireball.2.2 Product Specification



Published: November 2020

















Fireball.2.2



Urban Design Playpoints are climbers, rockers or twisters. Regarded as playpoints foremost, they convince further with their great and sculptural design. All URBAN DESIGN Playpoints are high-end engineered units made from high-quality materials like stainless steel with a brushed finish, powder coated recycled aluminium connectors, high density polyethylene (HDPE) panels and ITR-bearings for

maximum safety and durability.

The Fireball is the best place in town for those who love to get dizzy occasionally. The rotation axis is inclined at 2°. Move your body to and around the axis and you will feel what gravity is. The Fireball is absolutely strong enough for two or more users to take a spin.

90.260.307

 Product Family	Urban Design
 Length x Width x Height (m) Length x Width x Height ("-")	0,98 x 0,98 x 1,38 3-3 x 3-3 x 4-7
 Protective Surfacing Area acc. to DIN EN 1176 (m) Protective Surfacing Area acc. to ASTM/CSA (m) Protective Surfacing Area acc. to ASTM/CSA ("-")	5,0 x 5,0 4,7 x 4,7 15-3 x 15-3
 Fall Height acc. to EN 1176 (m) Fall Height acc. to ASTM/CSA ("-")	0,31 1-0
 Age	5
 Minimum Space required acc. to DIN EN 1176 (m²) Minimum Space required acc. to ASTM 1487 (ft²)	19,5 210
 Number of Foundations	1
 Concrete Volume C20/C25 (m³)	0,5
 Number of skilled Installers required	2
 Installation Time without Foundation	2 hours
 Dimensions of largest Part (m)	1,0 x 1,0 x 1,6
 Weight of heaviest Part (kg)	110
 Shipping Volume (m³)	1,1
 Total Weight (kg)	125
 Spare Part Guarantee	Lifelong
 Certified acc. to EN 1176	Z2 010256 0298

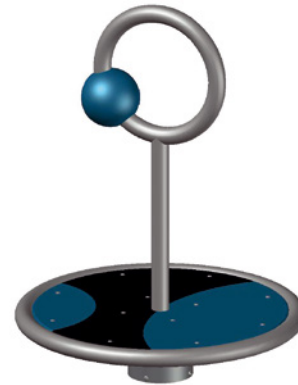

Technical Data

Technical changes are reserved. The following text can also be used for tenders.

Turntable:

The stainless steel plate with a diameter of Ø 960 mm (3'-2") is covered with HDPE plates and surrounded by a welded stainless steel tube with a diameter of Ø 60,3 mm (2 3/8").

Tubes and Balls:

The bent stainless steel tubes with a diameter of Ø 60,3 mm (2 3/8") are connected to a Frameworkor® aluminium ball with a diameter of Ø 200 mm (7 7/8"), that is sandblasted, powder-coated without solvents and securely closed with a durable EPDM cap.

Stand:

The fully integrated bearing unit forms a self-contained system and is therefore particularly insensitive to weather influences and requires little maintenance only.

Covering:

The non-skid HDPE plates with a thickness of 19 mm (3/4") are screwed flat on the turntable.