
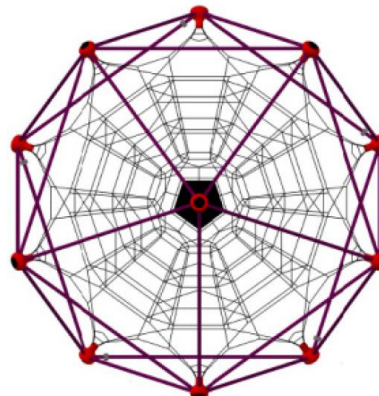


Product Specification Sheet Roplay VARIO L

| | |
|--|--|
| Product name | Roplay VARIO L |
| Item number | 7030014700000 |
| Recommended age group | 8+ |
| Falling Height (EN 1176) | 2,8 m (9'-2") |
| Length, width, height | 5,3 x 5,1 x 4,4 m (17'-5" x 16'-9" x 14'-5") |
| Protective Surfacing Area required (EN 1176) | 10,0 x 10,0 m (32'-10" x 32'-10") |
| Minimum space required (EN 1176) | 78,6 m ² (846 ft ²) |
| Ground anchor plates 700 mm below level | 5 |
| Number of skilled installers needed | 2 |
| Installation time without foundation | 5 hours |
| Dimensions of largest part | Ø 0,05 x 2,9 m (Ø 1 7/8" x 9'-6") |
| Weight for heaviest part | 140 kg (309 lbs) |
| Freight volume | 1,9 m ³ (67 ft ³) |
| Gross weight | 400 kg (882 lbs) |
| Spare part guarantee | Lifelong |
| Certificate No. EN 1176 | Z1A 14 03 10256 204 |

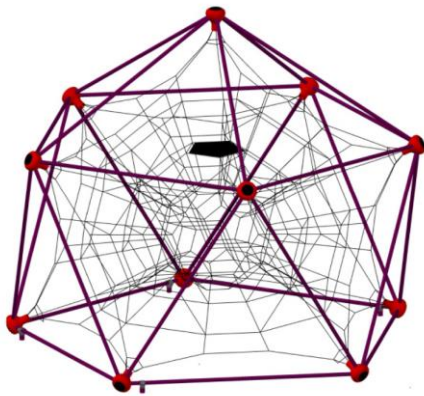

Product description:

Roplay VARIO L, icosahedron space framework, Height 4,4 m (14'-5") with a single Bucky-Ball net structure.

All anchor points are equipped with a central single-point tensioning system warranting that no fastening element or rope eyelet is accessible to users. The 25 steel members Ø 48,3 x 1466 mm (Ø 1 7/8" x 4'-10") in the framework are corrosion resistant and powder-coated environmentally sound.

The 11 aluminum-cast nodes in the framework are also coated in the zinc-powder-process.

The spatial netting is made of polyester-coated steel cables (U-Rope®) with a diameter of 16 mm (5/8"). Contrary to cable coatings out of polypropylene the polyester is more abrasion-resistant and color fast to UV-light. The steel wires are drawn galvanized.

As cross connectors in the spatial netting aluminium-cloverleaf rings are being used that have been proven in 20 years of employment.