
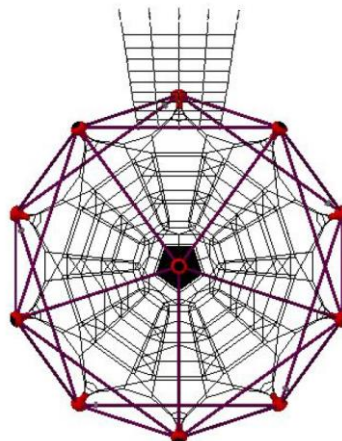


# Product Specification Sheet

## Roplay VARIO L + Access Net

Product name	Roplay VARIO L + Access Net
Item number	7030014700300
Recommended age group	8+
Falling Height (EN 1176)	2,8 m (9'-2")
Length, width, height	6,5 x 5,1 x 4,4 m (21'-4" x 16'-9" x 14'-5")
Protective Surfacing Area required (EN 1176)	10,3 x 10,0 m (33'-10" x 32'-10")
Minimum space required (EN 1176)	80,1 m <sup>2</sup> (862 ft <sup>2</sup> )
Ground anchor plates 700 mm below level	5
Number of skilled installers needed	2
Installation time without foundation	6 hours
Dimensions of largest part	Ø 0,05 x 2,9 m (Ø 1 7/8" x 9'-6")
Weight for heaviest part	140 kg (309 lbs)
Freight volume	2,3 m <sup>3</sup> (81 ft <sup>3</sup> )
Gross weight	490 kg (1080 lbs)
Spare part guarantee	Lifelong
Certificate No. EN 1176	Z1A 14 03 10256 204

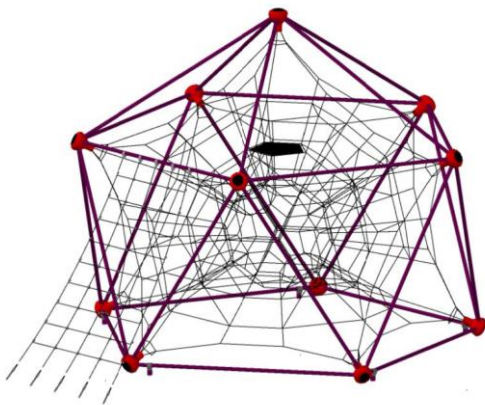

### Product description:

**Roplay VARIO L + Access Net, icosahedron space framework, Height 4,4 m (14'-5") with a single Bucky-Ball net structure.**

All anchor points are equipped with a central single-point tensioning system warranting that no fastening element or rope eyelet is accessible to users. The 25 steel members Ø 48,3 x 1466 mm (Ø 1 7/8" x 4'-10") in the framework are corrosion resistant and powder-coated environmentally sound.

The 11 aluminum-cast nodes in the framework are also coated in the zinc-powder-process.

The spatial netting is made of polyester-coated steel cables (U-Rope®) with a diameter of 16 mm (5/8"). Contrary to cable coatings out of polypropylene the polyester is more abrasion-resistant and color fast to UV-light. The steel wires are drawn galvanized.

As cross connectors in the spatial netting aluminium-cloverleaf rings are being used that have been proven in 20 years of employment.