




## Freeride – Product Specification



### Freeride

Get inspired! Freeride is both a seesaw and a lounger simultaneously and offers numerous options to exercise and chill out. Whether on your own or with others: your imagination knows no limits.

A special rubber bearing system provides the needed balance!

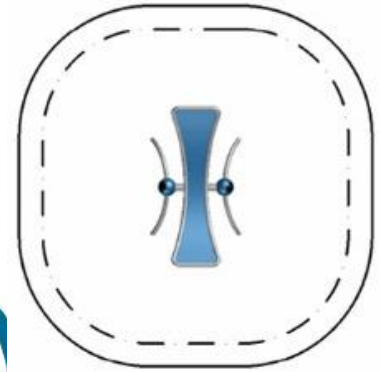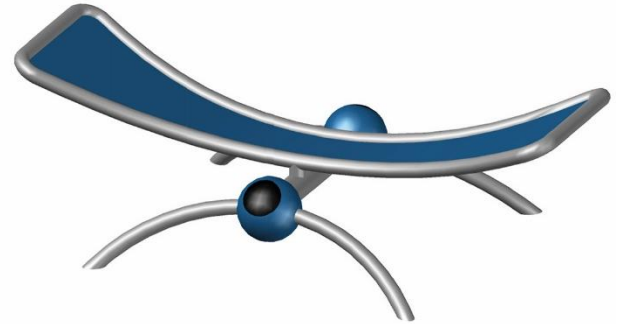

### Freeride – at a glance.

Product Family:	<b>Playpoints</b>	Number of Foundations:	<b>4 pc.</b>
Item Number:	<b>90.260.802</b>	Concrete Volume C20/C25:	<b>0.4 m³ (14.2 ft³)</b>
Children's Age:	<b>5+</b>	Number of skilled installers required:	<b>2</b>
Fall Height (DIN EN 1176):	<b>1.1 m (3'-8")</b>	Installation Time without foundation:	<b>2 hours</b>
Length x Width x Height:	<b>2.3 m x 1.3 m x 0.7 m</b> <b>(7'-7" x 4'-4" x 2'-4")</b>	Dimensions of largest part:	<b>2.3 m x 1.3 m x 1.6 m</b> <b>(7'-7" x 4'-4" x 5'-3")</b>
Protective Surfacing Area (DIN EN 1176):	<b>4.3 m x 4.4 m</b>	Weight of the heaviest part:	<b>100 kg (221 lbs)</b>
Protective Surfacing Area (ASTM 1487):	<b>5.0 m x 5.1 m</b> <b>(16'-5" x 16'-9")</b>	Shipping Volume:	<b>5.6 m³ (198 ft³)</b>
Minimum space required DIN EN 1176:	<b>16.7 m²</b>	Shipping Weight:	<b>120 kg (265 lbs)</b>
Minimum space required ASTM 1487:	<b>21.9 m² (236 ft²)</b>	Spare part guarantee:	<b>Lifelong</b>

### Technical Data.

The following text can also be used for tenders.

#### Tubes:

Stainless steel tubes, Ø 60.3 mm (2 3/8"), connected to Frameworx®-aluminum ball connectors; Ø 250 mm (9-13/16"); anti-corrosion treatment and color finish: sandblasting and solvent-free zinc-/ epoxy-/ polyester-process; securely closed with durable EPDM- caps

#### Bearing:

Axis held by encapsulated rubber cushioning system mounted in Frameworx®-aluminum ball connectors; Ø 250 mm (9-13/16")

#### Coating:

EPDM-rubber-coating area within the surface

  
**Berliner**  
Berliner Seilfabrik GmbH & Co.  
Lengeder Straße 2/4  
D-13407 Berlin

Tel. +49.(0)30.41 47 24-0  
Fax +49.(0)30.41 47 24-33

info@berliner-seilfabrik.com  
www.berliner-seilfabrik.com

